

Hydrophobic IOL

Manufactured by Synchronised Cast Molding Procedure

HYFLEX-Y Versatile

Hydrophobic MICL




Aberration Controlled | Yellow Foldable
Glistening Free | Micro Incision Lens




EYEOL U.K. LIMITED

Hydrophobic IOL

ELP Optimized Design for Predictable Refractive Outcome

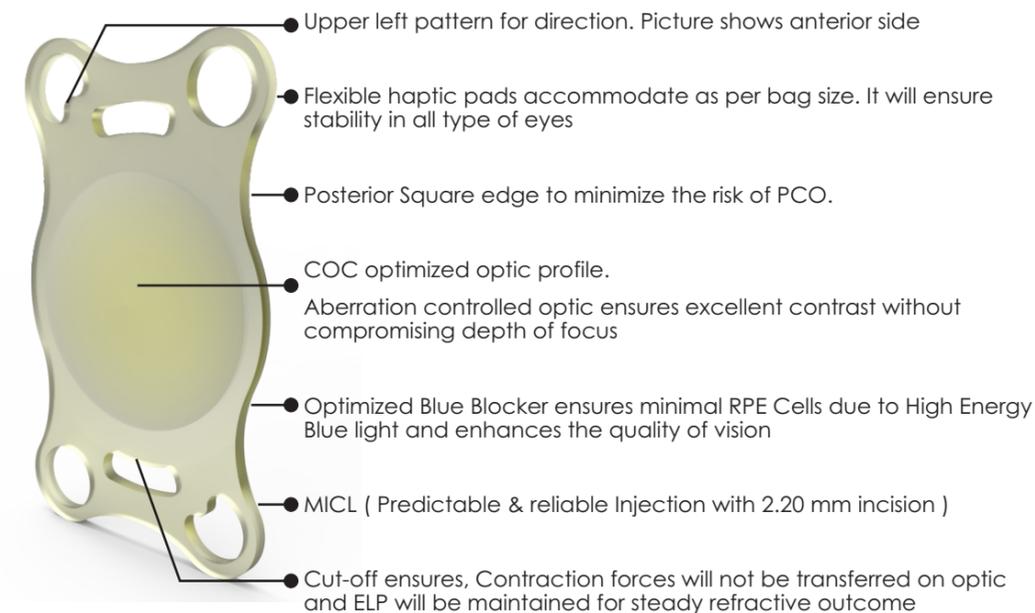

Specification:

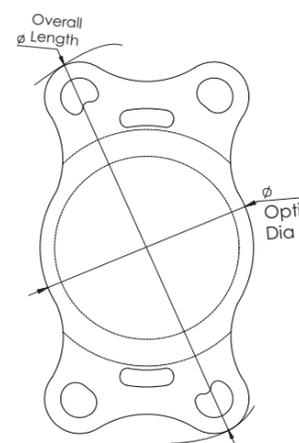

Model	AS-6V
Material	Hydrophobic (Yellow Tinted)
IOL Powers	+10.0 D to +27.0 D (0.5 D Steps)
Optic Diameter	6.00 mm
Overall Length	11.00 mm (Customized Range 10.50 mm to 12.00 mm)
Optic Type	Negative Aspheric Optic
Haptic Angulation	0° (Plano)
Haptic Configuration	Plate - Accommodative Haptic
Abbe Number	>52
Refractive Index	1.53
A-Constant	118.52 (SRK-T, US Biometry)*
	119.0 (SRK-T, Optical Biometry)*

*The mentioned value are estimates. It is recommended that the surgeon derives his/her own values based on the refractive outcome.



EYEOL U.K. LIMITED

8 Apex Business Centre,
Boscombe Road, Dunstable,
Bedfordshire, LU5 4SB, U.K.
Fax: +44 1582 607009
Phone: +44 (0) 1582 477002
Email: info@eyeol.co.uk
Web: www.eyeol.co.uk