

Hydrophobic
Monofocal IOLS

Manufactured by Synchronised Cast Molding Procedure

HYFLEX

Hydrophobic



Innovative Intraocular Lens
Aspheric Optic | Square Edge



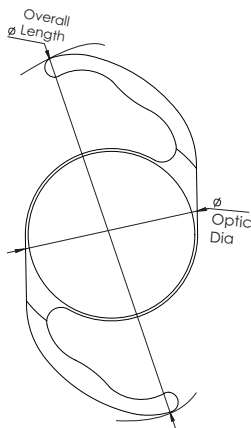
EYEOL U.K. LIMITED

Hydrophobic
Monofocal IOLS

Proprietary Hydrophobic Material with UV Protection



- The lens design ensures smooth insertion and proper Positioning inside the eye.
- Square Edge reduces the incidence of PCO.
- Reduces the incidence of Vacuole formation.
- The material has a Refractive Index of 1.53 which is optimal to prevent reflectivity
- Proprietary Hydrophobic Material eliminates Glistening Effect.
- Predictable & reliable Injection with 2.20 mm incision

Specification: 	Model	Hyflex Aspherical
	Material	Hydrophobic Acrylic
	IOL Powers	+0.0 D to +40.0 Diopter (0.5 D steps)
	Optic Diameter	6.0 mm
	Overall Length	13.00 mm
	Optic Type	Aspheric Optic
	Haptic Angulation	0° (Plano)
	Haptic Configuration	Modified C-L Haptic
	Refractive Index	1.53
	A-Constant	118.8 (US Biometry)*
		119.3 (Optical Biometry)*

*The values are of estimates only. It is recommended that the surgeon derive his / her own values based on data of the eye to be operated upon & characteristic of IOL.



EYEOL U.K. LIMITED

8 Apex Business Centre,
Boscombe Road, Dunstable,
Bedfordshire, LU5 4SB, U.K.
Fax: +44 1582 607009
Phone: +44 (0) 1582 477002
Email: info@eyeol.co.uk
Web: www.eyeol.co.uk