

Hydrophobic
Preloaded IOL

Manufactured by Synchronised Cast Molding Procedure

HYFLEX

Hydrophobic MICL



Hydrophobic Pre-loaded IOL
Micro Incision Lens




EYEOL U.K. LIMITED


Hydrophobic
Preloaded IOL

ELP Optimized Design for Predictable Refractive Outcome

- One Handed Technique
- Reduced Preparation Time
- Optimal Refractive Outcome
- Predictable & reliable Injection with 2.20 mm incision

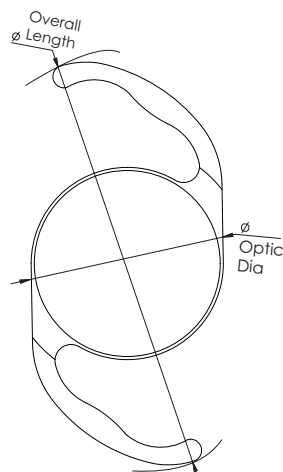Specification:	Model	Hyflex Aspherical
	Material	Hydrophobic (Clear)
	IOL Powers	+0.0 D to +40.0 Diopter (in 0.5 D steps)
	Optic Diameter	6.0 mm
	Overall Length	13.00 mm
	Optic Type	Aspheric Optic
	Haptic Angulation	0° (Plano)
	Haptic Configuration	Modified C-L Haptic
	Refractive Index	1.53
	A-Constant	118.8 (US Biometry)*
		119.3 (Optical Biometry)*

*The mentioned value are estimates. It is recommended that the surgeon derives his/her own values based on the refractive outcome.



EYEOL U.K. LIMITED

8 Apex Business Centre,
Boscombe Road, Dunstable,
Bedfordshire, LU5 4SB, U.K.
Fax: +44 1582 607009
Phone: +44 (0) 1582 477002
Email: info@eyeol.co.uk
Web: www.eyeol.co.uk