

Hydrophobic
Preloaded IOL

Manufactured by Synchronised Cast Molding Procedure

HYFLEX-Y

Hydrophobic MICL



Aberration Neutral | Aspheric Optic | Square Edge
Blue Blocker Yellow | Micro Incision Lens




EYEOL U.K. LIMITED

Hydrophobic
Preloaded IOL

Yellow Hydrophobic Acrylic Intraocular Lens

- The lens design ensures smooth insertion and proper Positioning inside the eye.
- Square Edge reduces the incidence of PCO.
- Reduces the incidence of Vacuole formation.
- The material has a Refractive Index of 1.53 which is optimal to prevent reflectivity
- Proprietary Hydrophobic Material eliminates Glistening Effect.
- Predictable & reliable Injection with 2.20 mm incision

Specification:

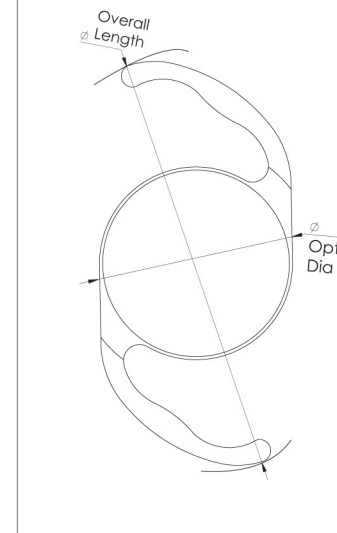

Model	Hyflex Yellow
Material	Hydrophobic (Yellow Tinted)
IOL Powers	+0.0D to +40.0 Diopter (0.5D steps)
Optic Diameter	6.0 mm
Overall Length	13.00 mm
Optic Type	Aspheric Optic
Haptic Angulation	0° (Plano)
Haptic Configuration	Modified C-L Haptic
Abbe Number	>52
Refractive Index	1.53
A-Constant	118.8 (SRK-T, US Biometry)* 119.3 (SRK-T, Optical Biometry)*

*The mentioned value are estimates. It is recommended that the surgeon derives his/her own values based on the refractive outcome.



EYEOL U.K. LIMITED

8 Apex Business Centre,
Boscombe Road, Dunstable,
Bedfordshire, LU5 4SB, U.K.
Fax: +44 1582 607009
Phone: +44 (0) 1582 477002
Email: info@eyeol.co.uk
Web: www.eyeol.co.uk