

Hydrophobic  
Preloaded IOL

Manufactured by Synchronised Cast Molding Procedure

# HYFLEX-Y *Versatile*

## Hydrophobic MICL




Aberration Controlled | Preloaded Delivery System  
Yellow Foldable | Micro Incision Lens




EYEOL U.K. LIMITED

Hydrophobic  
Preloaded IOL

## ELP Optimized Design for Predictable Refractive Outcome

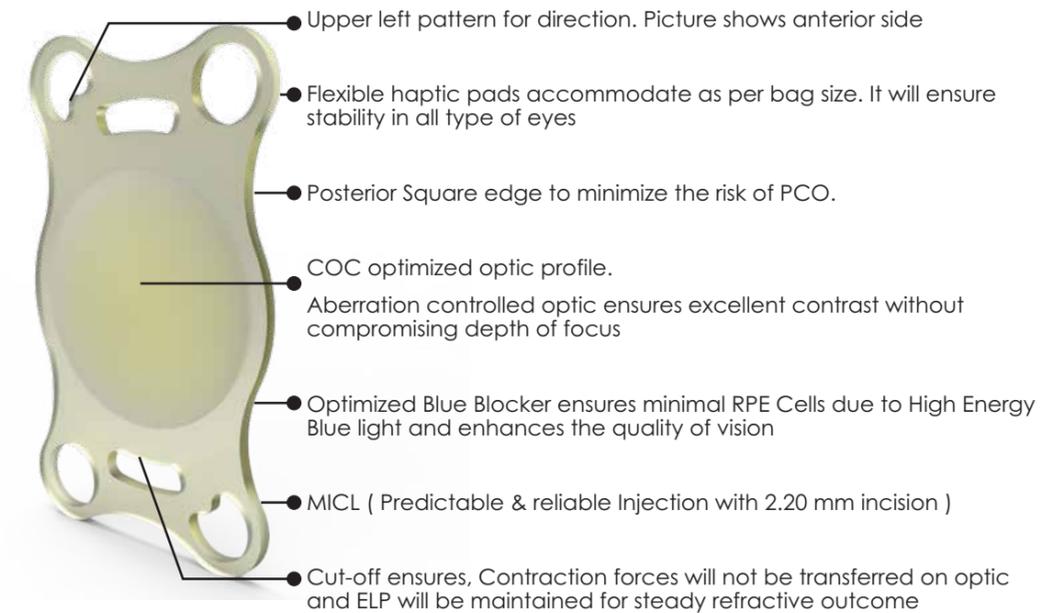

### Specification:

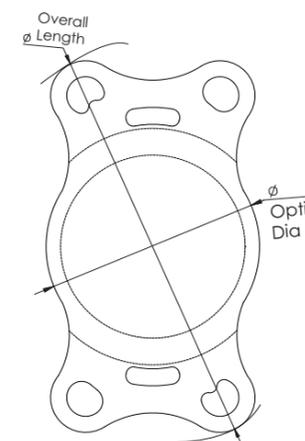

<b>Model</b>	AS-6VP
<b>Material</b>	Hydrophobic ( Yellow Tinted )
<b>IOL Powers</b>	+0.0 D to +40.0 D ( 0.5 D Steps )
<b>Optic Diameter</b>	6.00 mm
<b>Overall Length</b>	11.00 mm ( Customized Range 10.50 mm to 12.00 mm )
<b>Optic Type</b>	Negative Aspheric Optic
<b>Haptic Angulation</b>	0° ( Plano )
<b>Haptic Configuration</b>	Plate - Accommodative Haptic
<b>Abbe Number</b>	>52
<b>Refractive Index</b>	1.53
<b>A-Constant</b>	118.52 ( SRK-T, US Biometry)* 119.0 ( SRK-T, Optical Biometry )*

\*The mentioned value are estimates. It is recommended that the surgeon derives his/her own values based on the refractive outcome.



EYEOL U.K. LIMITED

8 Apex Business Centre,  
Boscombe Road, Dunstable,  
Bedfordshire, LU5 4SB, U.K.  
**Fax:** +44 1582 607009  
**Phone:** +44 (0) 1582 477002  
**Email:** info@eyeol.co.uk  
**Web:** www.eyeol.co.uk